






- **High reliability and ruggedness**
- **High power handling**
- **Low Insertion Loss**

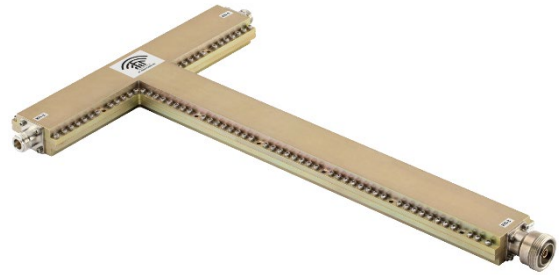

ELECTRICAL & ENVIRONMENTAL SPECIFICATIONS

Frequency:	200-1000 MHz
Power Handling:	2000 W CW
Insertion Loss:	0.2 dB max.
Isolation :	6 dB
Input VSWR:	1.2:1 max
Op. Case Temp.:	-40 °C to 85 °C
Storage Temperature:	-40 °C to 85 °C
Shock :	MIL-STD-810F/G
Vibration :	MIL-STD-810F/G

Typical Insertion/Return Loss

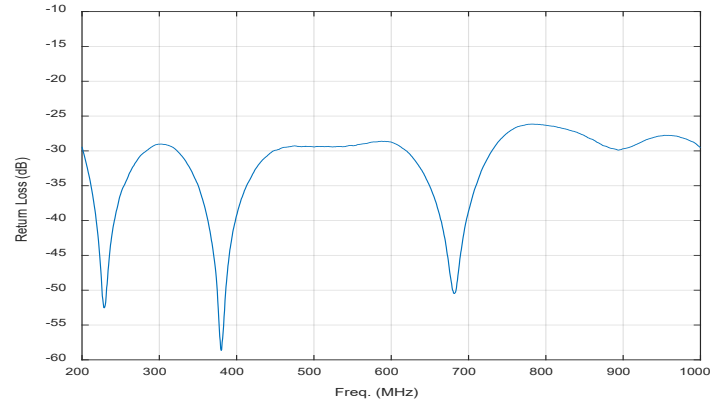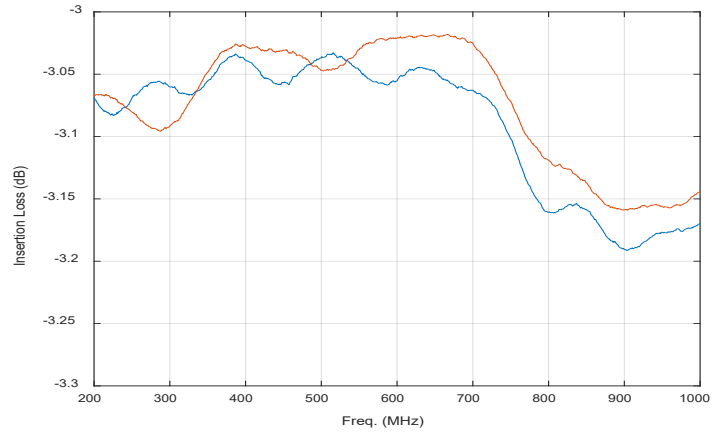

INTERFACES

RF Inputs:	N Female
RF Output:	7/16 DIN Female

MECHANICAL SPECIFICATIONS

Size (mm) :	416.8 x 249.2 x 26
Plating :	Yellow Chromate

