



JPC00300200P63B4; 30-200 MHz 2000W 4-WAY POWER SPLITTER / COMBINER

- Small Size and High Power Handling
- High reliability and ruggedness
- Ultra Broadband
- 50 Ohm Input & Output Impedance
- Low Insertion Loss





INTERFACES

RF Input (1):	N Female
RF Input (2):	N Female
RF Input (3):	N Female
RF Input (4):	N Female
RF Output (5):	N Female

ELECTRICAL & ENVIRONMENTAL SPECIFICATIONS

Frequency:	30-200 MHz
Power Handling:	2000 W CW
Insertion Loss:	0.5 dB max.
Amplitude Balance:	0.2 dB max.
In/ Out VSWR:	2:1 max
Operating Case Temp.:	-40 °C to 85 °C
Storage Temperature:	-40 °C to 85 °C
Shock:	MIL-STD-810F/G
Vibration:	MIL-STD-810F/G

TYPICAL PERFORMANCE GRAPHS

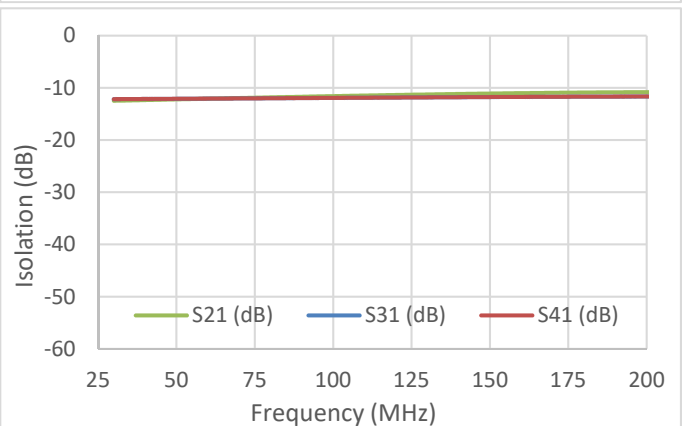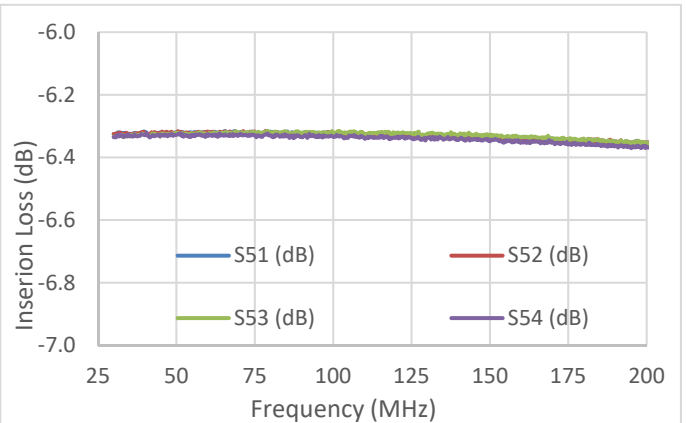

MECHANICAL SPECIFICATIONS

Size (mm) :	133 × 205 × 43
Weight :	2300 gr.
Plating :	Yellow Chromate

