




- **High reliability and ruggedness**
- **High power handling**
- **Low Insertion Loss**

ELECTRICAL & ENVIRONMENTAL SPECIFICATIONS

Frequency:	500-2500 MHz
Power Handling:	1000 W CW
Insertion Loss:	0.6 dB max.
Amplitude Balance:	0.25 dB max.
Input VSWR:	1.5:1 max
Operating Case Temp.:	-40 °C to 85 °C
Storage Temperature:	-40 °C to 85 °C
Shock	: MIL-STD-810F/G
Vibration	: MIL-STD-810F/G

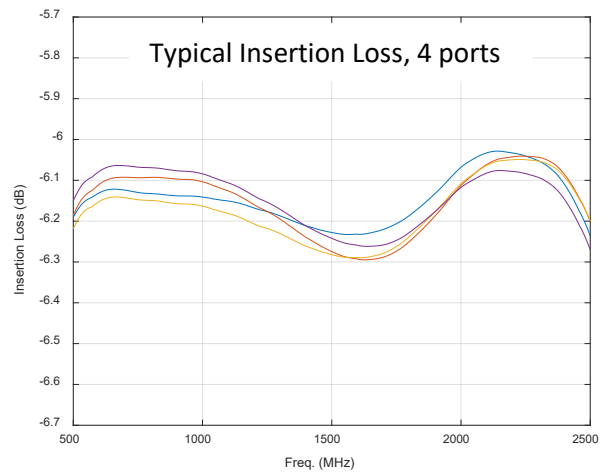

INTERFACES

RF Inputs: N Female
RF OutputS: N Female

MECHANICAL SPECIFICATIONS

Size (mm) : 194.8 x 95.7 x 95.7
Plating : Yellow Chromate

