




# JC00010030P71C70; 1.5-30 MHz 12000W DIRECTIONAL COUPLER

- Small Size and High Power Handling
- High reliability and ruggedness
- Ultra Broadband
- 50 Ohm Input & Output Impedance
- Flat Forward & Reflected Power Sampling
- High Isolation and Directivity

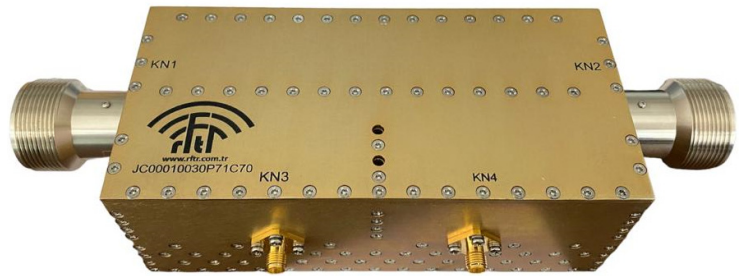

## INTERFACES

RF Input (1):	LC Female
RF Output (2):	LC Female
Coupling Port (3):	SMA Female
Isolation Port (4):	SMA Female

## TYPICAL PERFORMANCE GRAPHS

## ELECTRICAL & ENVIRONMENTAL SPECIFICATIONS

Frequency:	1.5-30 MHz
Power Handling:	12000 W CW
Insertion Loss:	0.1 dB max.
Coupling:	70 ± 0.5 dB
Coupling Flatness:	± 1 dB
In/ Out VSWR:	1.2:1 max
Directivity:	> 20 dB
Operating Case Temp.:	-40 °C to 85 °C
Storage Temperature:	-40 °C to 85 °C
Shock:	MIL-STD-810F/G
Vibration:	MIL-STD-810F/G

## MECHANICAL SPECIFICATIONS

Size (mm) :	151 x 79 x 53
Weight :	1.600 gr.
Plating :	Yellow Chromate

